

12

EUROPEAN PATENT APPLICATION

21 Application number: 89312802.5

51 Int. Cl.⁵: **H01B 1/12, H05B 33/26**

22 Date of filing: 08.12.89

30 Priority: 09.12.88 JP 309940/88
31.08.89 JP 222840/89

43 Date of publication of application:
13.06.90 Bulletin 90/24

64 Designated Contracting States:
DE FR GB


71 Applicant: **NIPPON OIL CO., LTD.**
3-12, 1-chome, Nishi-shimbashi Minato-ku
Tokyo(JP)

72 Inventor: **Shikatani, Yutaka**
2-228, Kosugi-cho Nakahara-ku
Kawasaki-shi Kanagawa-ken(JP)
Inventor: **Kataoka, Naoki**
17-25, Shinjonaka-machi Nakahara-ku
Kawasaki-shi Kanagawa-ken(JP)
Inventor: **Kuroda, Nobuyuki**
185-2, Shirahatakami-cho Kanagawa-ku
Kawasaki-shi Kanagawa-ken(JP)
Inventor: **Matsuura, Kazuo**
2-22-18, Higashi-Yukigaya Ota-ku
Tokyo(JP)

74 Representative: **Cropp, John Anthony David et al**
MATHYS & SQUIRE 10 Fleet Street
London, EC4Y 1AY(GB)

54 **Hole transporting material.**

57 A hole transporting material is constituted by a compound represented by the following general formula (1):

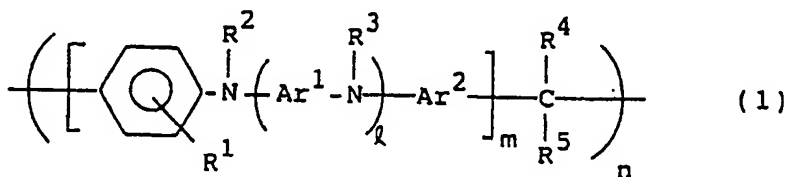

wherein R¹, R², R³, R⁴ and R⁵, which may be the same or different, are each independently hydrogen or a hydrocarbon residue having 1 to 20 carbon atoms; Ar¹ and Ar² are each independently a divalent hydrocarbon residue; l is an integer of 0 or more; m is an integer of 1 or more; and n is an integer of 2 or more.

Hole Transporting Material

Background of the Invention

The present invention relates to a novel hole transporting material.

With development of the electronics field there is a demand for a material capable of efficiently
 5 transporting either electrons or holes in fabricating various electronics devices.

Hole transporting materials which carry only holes in high efficiency are now in wide use as photoreceptor in electrophotography, and their application to organic electroluminescent devices is expected.

For example, an organic photoconductor (hereinafter referred to simply as "OPC") has recently
 10 attracted attention of many concerns in quick tempo as an organic photoreceptor mainly in its application to electrophotography. When used as a photoreceptor, OPC plays the role of a carrier transporting material.

OPC possesses various features, such as improved processability, easy to constitute a device, good electric charge accepting and holding properties, and advantage in cost. Therefore, researches are being made energetically not only about using OPC as a substitute for photoreceptor using inorganic materials but
 15 also about the development of a organic photoreceptor of OPC having a new performance.

Heretofore, various organic photoconductive compounds have been known as OPC's. Typical examples include various low molecular weight organic compounds such as triphenylamine derivatives, pyrazoline derivatives, oxadiazole derivatives, indoline derivatives and carbazole derivatives. These various OPC's per se are low molecular compounds, so unmoldable, and the large area which is required for a photoreceptor
 20 cannot be attained by the use of them. For example, therefore, such OPC's are mixed and dispersed in a transparent high polymer such as polycarbonate as a matrix polymer to prepare OPC photoreceptor.

Therefore, a restriction is placed on the OPC content in the matrix polymer. At a high OPC concentration, dispersibility of OPC in the matrix becomes less uniform so it has been difficult to use OPC at a high concentration. For this reason, a limit is also reached in the carrier transporting ability in a OPC
 25 photoreceptor, that is, it is impossible to attain a high carrier mobility. Under the circumstances it has been desired to develop an OPC having superior photoconductivity.

An electroluminescent device (ELD) has long been noted as a thin large-area light source. With the recent spread and reduction in size and weight of office automation (OA) devices, a liquid crystal display has come to be widely adopted as a display device, and now there is an increasing expectation for ELD as
 30 a back light for the liquid crystal display.

ELD, which is a thin, flat-shape light emitting device of a light weight, possesses such features as no flicker on the screen, a wide visual angle and a low power consumption. However, since the ELD which has heretofore been put to practical use is operated by a light emitting mechanism called a collision excitation type, it is necessary to use a high driving AC voltage of 200 volts or so; besides, the light emission
 35 efficiency is low and the luminescence is also low.

C.W. Tang et al. [Appl. Phys. Lett. 51(12), 913 (1987)] manufactured for trial an organic thin film ELD of an injection type different from the conventional light emitting mechanism, and showed that the drawbacks of the conventional AC voltage driven, collision excitation type ELD. An injection type ELD is basically of a sandwich structure wherein a light emitting layer is sandwiched in between an electron injection electrode and a hole injection electrode. But, according to the ELD developed by C.W. Tang et al., an arylamine-based organic hole transporting layer is formed by vapor deposition between the light emitting layer and the
 40 hole injection electrode, and as the electron injection electrode there is used a metal having a small work function such as, for example, magnesium, whereby they showed that the ELD could be driven at a low DC voltage of several tens of volts or so and that a high luminance light emission comparable to that of a light emitting diode could be attained. It is apparent that an important component for fabricating a low DC voltage driven, organic thin film ELD of high luminance is an organic hole transporting layer. In order to obtain an
 45 ELD of a practical level and a higher performance it is desired to obtain a hole transporting material which can be easily made uniform and small in film thickness. Particularly, for fabricating an ELD of a large area on an industrial scale it is necessary to form a thin hole transporting film having a uniform thickness, free of defects such as pin-holes and high in reliability. But it cannot be said that the conventional means such as
 50 vapor deposition satisfy those requirements.

Thus, the conventional hole transporting materials involve various problems.


It is an object of the present invention to solve the above-mentioned problems of the prior art.

It is another object of the present invention to provide a novel hole transporting material having extremely superior hole transporting ability and processability, that is, capable of overcoming all of the

problems of the conventional OPC's and hole moving materials typified by hole transporting materials for ELD.


5 Summary of the Invention

In one aspect the present invention resides in a hole carrying material constituted by a compound of the following general formula (1):

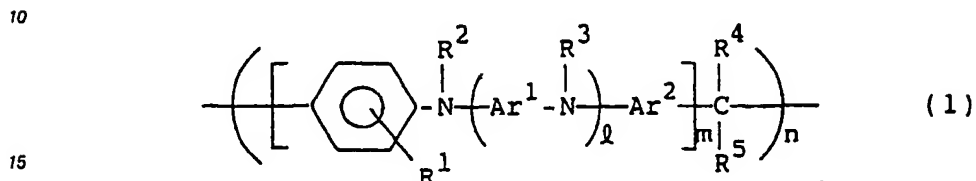


wherein R¹, R², R³, R⁴ and R⁵, which may be the same or different, are each hydrogen or a hydrocarbon residue having 1 to 20 carbon atoms; Ar¹ and Ar² are each a divalent aromatic hydrocarbon residue; l is an integer of 0 or more; m is an integer of 1 or more; and n is an integer of 2 or more.

In another aspect the present invention resides in a photoconductor constituted by a compound of the following general formula (1):

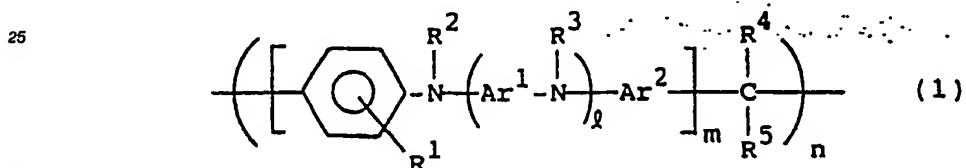

wherein R¹, R², R³, R⁴ and R⁵, which may be the same or different, are each hydrogen or a hydrocarbon residue having 1 to 20 carbon atoms; Ar¹ and Ar² are each a divalent aromatic hydrocarbon residue; l is an integer of 0 or more; m is an integer of 1 or more; and n is an integer of 2 or more.

In a further aspect the present invention resides in a hole transporting material for an electroluminescent device constituted by a compound of the following general formula (1):

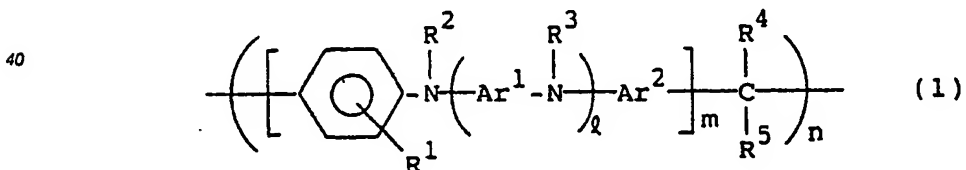

wherein R¹, R², R³, R⁴ and R⁵, which may be the same or different, are each hydrogen or a hydrocarbon residue having 1 to 20 carbon atoms; Ar¹ and Ar² are each a divalent aromatic hydrocarbon residue; l is an integer of 0 or more; m is an integer of 1 or more; n is an integer of 2 or more.

50 Detailed Description of the Invention




The present invention will be described in detail below.

55 The "hole transporting material" as referred to herein indicates a material capable of mainly holes alone. The hole transporting material of the present invention is characterized by being represented by the general formula (1).

In the compounds of the general formula (1), R¹, R², R³, R⁴ and R⁵ are each independently hydrogen or a hydrocarbon residue having 1 to 20, preferably 1 to 12, carbon atoms. The substituents R¹ to R⁵ may be

the same as or different from one another. Preferred examples of R^1 , R^2 and R^3 are hydrogen and hydrocarbon residues such as alkyl groups, preferably alkyl groups having 1 to 8 carbon atoms e.g. methyl, ethyl, n-propyl, i-propyl, n-butyl, i-butyl and n-hexyl, alkoxyphenyl groups, e.g. methoxyphenyl and ethoxyphenyl, alkylphenyl groups, e.g. tolyl and ethylphenyl, aryl groups, preferably aryl groups having 6 to 10 carbon atoms, e.g. phenyl, aralkyl groups, and derivatives thereof. Preferred examples of R^4 and R^5 are hydrogen and hydrocarbon residues such as alkyl groups, e.g. methyl, ethyl, n-propyl, i-propyl, n-butyl, i-butyl and n-hexyl, alkoxyphenyl groups, e.g. methoxyphenyl and ethoxyphenyl, alkylphenyl groups, e.g. tolyl and ethylphenyl, aryl groups, e.g. phenyl, chlorophenyl and nitrophenyl, aralkyl groups, and derivatives thereof, furyl, and pyridyl.


Ar^1 and Ar^2 in the compounds of the general formula (1) each represent a divalent aromatic hydrocarbon residue, and both may be the same or different. Examples of Ar^1 are functional groups represented by the following general formulae (2), (3) and (4):

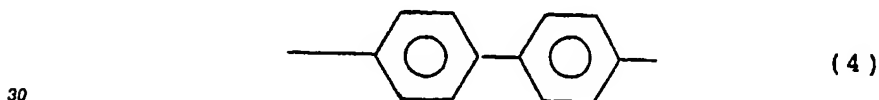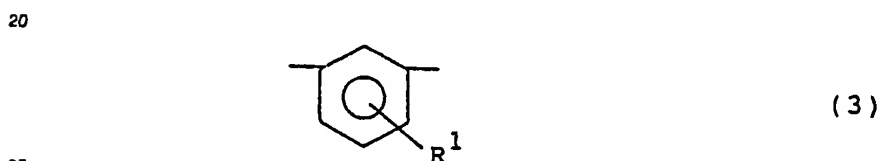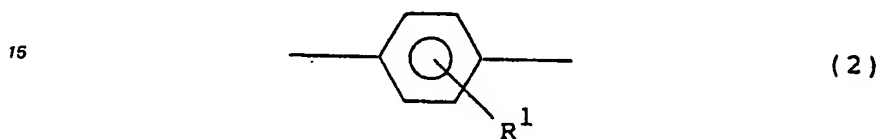

wherein R^1 is the same as in the general formula (1). Preferred examples are phenylene groups such as p-phenylene, m-phenylene, p-biphenylene, methyl-p-phenylene, ethyl-p-phenylene, methoxy-p-phenylene, methyl-m-phenylene, ethyl-m-phenylene, methoxy-m-phenylene, and derivatives thereof.

Preferred examples of Ar^2 are, in addition to the above phenylene groups of the general formulae (2), (3), (4) and derivatives thereof, divalent monocyclic or condensed polycyclic aromatic hydrocarbon residues such as 1,5- or 2,7-naphthylene, 1,4-, 1,5- or 2,6-anthraquinonylene, and benzanthrone, as well as divalent hereto atom-containing condensed heterocyclic aromatic hydrocarbon residues, for example, divalent heterocyclic groups such as 2-phenylbenzoxazolidiyl, 2-phenylbenzimidazolidiyl, carbazolidiyl, 2-phenylbenzothiazolidiyl, 2-phenylbenzotriazolidiyl, dibenzothiophenediyl, dibenzothiophenoxidediyl, 9-acridonediyl, xanthonediyl, and phenoxazinediyl. l is an integer of 0 or more, usually 0 to 50, preferably 0 to 10, more preferably 0 to 5, most preferably 1 to 5; m is an integer of 1 or more, usually 1 to 50, preferably 1 to 30 more preferably 1 to 10; and n is an integer of 2 or more, usually 2 to 1000, preferably 5 to 500, more preferably 20 to 200. The compounds in question have a substantially linear structure. When $l = 0$ and $m = 1$, n is usually larger than 20, preferably 30 to 1000, more preferably 40 to 200, in order to further enhance the effect of the present invention. Both ends of the formula (1) are not specially limited, but are usually nuclear-substituted hydrogens.

The compounds of the general formula (1) are usually prepared by polycondensation of compounds of the following general formula (5) and compounds of the following general formula (6) or polymers thereof, but their preparation is not limited to this method:

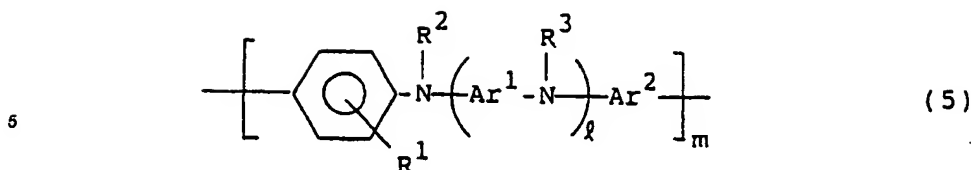

R^4COR^5 (6)

10 wherein R^1 , R^2 , R^3 , R^4 , R^5 , Ar^1 , Ar^2 , and l and m are the same as in the general formula (1).

Examples of the compounds represented by the general formula (5) include $\text{N,N}'$ -diphenyl-p-phenylenediamine compounds and N -phenyl- N' -(4-phenylamino)phenyl-p-phenylenediamine compounds.

Among the compounds of the general formula (5), those wherein m is 2 or more are usually prepared by subjecting compounds of the same general formula wherein m is 1 to an oxidative coupling reaction
 15 using an oxidizing agent such as a manganese compound or ferric salt or to an electrolytic oxidative polymerization. For example, in the case of an $\text{N,N}'$ -diphenyl-p-phenylenediamine compound as a compound of the general formula (5) wherein $m \geq 2$, it can be prepared by an oxidative coupling reaction of $\text{N,N}'$ -diphenyl-p-phenylenediamine in a solvent such as ethanol, acetone, acetonitrile, ether, or benzene, using ferric chloride as a catalyst. In this case, the reaction can be carried out at a temperature in the range
 20 of from -50°C to 100°C , preferably from -20°C up to the boiling point of the solvent used, for 10 minutes to 100 hours, preferably 1 to 50 hours.

As typical examples of such $\text{N,N}'$ -diphenyl-p-phenylene-diamine compounds there are mentioned $\text{N,N}'$ -dimethyl- $\text{N,N}'$ -diphenyl-p-phenylenediamine, $\text{N,N}'$ -diethyl- $\text{N,N}'$ -diphenyl-p-phenylenediamine, and $\text{N,N}'$ -dipropyl- $\text{N,N}'$ -diphenyl-p-phenylenediamine.

25 Other compounds of the general formula (5) than the $\text{N,N}'$ -diphenyl-p-phenylenediamine compounds are also prepared by a conventional method, for example, by a method in which aromatic amines and aromatic hydroxy compounds are reacted in an organic solvent in the presence of a transition metal catalyst or by a method in which phthalic acid ester is used as a starting material. More concrete contents of these methods are described in Japanese Patent Laid Open No. 38311/1980 and Journal of Polymer Science,
 30 Part C, 22, p.451 (1968).

As examples of compounds represented by the general formula (6) there are mentioned carbonyl compounds such as aldehydes, polymers of aldehydes and ketones.

Typical examples of aldehydes include formaldehyde, acetaldehyde, propionaldehyde, butylaldehyde, benzaldehyde, acrylaldehyde, cinnamaldehyde, anisaldehyde, nicotinic aldehyde, nitrobenzaldehyde,
 35 chlorobenzaldehyde, and furfural.

The polymers of aldehydes represent polymers which are obtained by self-condensation of aldehydes of the general formula (6) in the form of concentrated solutions or by condensation thereof in the presence of an acid catalyst and which hydrolyze easily under the reaction conditions for preparing the copolymer of the invention and form aldehyde monomers. Typical examples of such aldehyde polymers include
 40 paraformaldehyde which is a polymer of formaldehyde and paraldehyde which is trimer of acetaldehyde.

As examples of ketones there are mentioned acetone, ethyl methyl ketone, diethyl ketone, and cyclohexylacetone.

The polycondensation of a compound of the general formula (5) and a compound of the general formula (6) can be performed in an organic solvent in which both are soluble, at a temperature of 0° to 200°C ,
 45 using an acid or alkali catalyst. As examples of acid catalysts there are mentioned inorganic acids such as sulfuric acid, hydrochloric acid, phosphoric acid, perchloric acid and diphosphorus pentoxide, as well as organic acids such as formic acid, acetic acid, propionic acid, methanesulfonic acid and p-toluenesulfonic acid. These acids may be used each alone or in combination of two or more. Preferred examples of organic solvents include ethers such as ethyl ether, tetrahydrofuran and dioxane, halogenated hydrocarbons such as
 50 chloroform, dichloromethane and chlorobenzene, nitro compounds such as nitrobenzene, as well as acetonitrile, propylene carbonate, dimethylformamide, and N -methylpyrrolidone. A suitable reaction time can be selected in the range of 1 minute to 500 hours, preferably 5 minutes to 200 hours.

The compound of the general formula (1) thus prepared in the present invention is a thermoplastic resin which is solvent-soluble, can be melted by heating, is superior in processability and can afford various
 55 moldings of desired shapes and that having a high mechanical strength. The compound in question further possesses a high hole transporting ability. Therefore, a hole transporting material using this compound is per se superior in moldability, thus permitting the formation of a thin film having a uniform thickness of a submicron order. Further, since a matrix polymer is not needed, the said hole transporting material has a


high hole mobility as compared with conventional hole transporting materials of this sort. The hole transporting material of the present invention is applicable to various uses. For example, it is suitable as a photoconductor typified by an organic photoreceptor in electrophotography or as a hole transporting material for ELD. It per se can afford a large area and exhibits a high hole transporting ability.

Examples

The present invention will be described below more fully by the following examples, but the invention is not limited thereto.

Example 1

1.00 g of N,N'-dimethyl-N,N'-diphenyl-p-phenylenediamine was placed in a three-necked 100 ml flask which had been purged with nitrogen, then 15 ml of nitrobenzene and 6 ml of acetic acid were added and dissolved therein. Thereafter, 120 μ l of sulfuric acid and 250 μ l of propionaldehyde were added and reaction was allowed to take place at 50°C for 140 hours under stirring. The reaction solution was poured into 300 ml of ethanol containing 30 ml of NaOH and the resulting precipitate of reddish brown was filtered off, then washed with ethanol and distilled water, followed by drying to afford 0.85 g of a reddish brown powder. The powder was determined for $^1\text{H-NMR}$, $^{13}\text{C-NMR}$ and IR (Fig. 1) spectra; as a result, it proved to have the following structure:

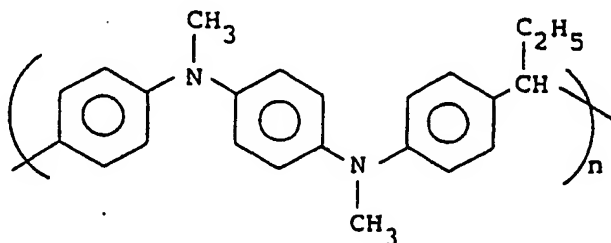

$^1\text{H-NMR}(\text{C}_5\text{D}_6)$: (ppm)
6.82 - 7.20 (m), 3.65 (m), 2.97 (m), 2.02 (m), 0.92 (t)
 $^{13}\text{C-NMR}(\text{CDCl}_3)$: (ppm)
147.4, 143.7, 137.4, 128.4, 122.6, 118.6, 51.8, 40.4, 28.9, 12.9

The polymer thus obtained was dissolved in chloroform, and using the resulting solution, a polymer film was formed on a copper plate according to a casting method. With respect to the polymer film thus formed, a charge carrier mobility was determined according to a time-of-flight method (TOF method); as a result, a hole mobility of $10^{-6} \text{ cm}^2/\text{V}\cdot\text{sec}$ was observed.


Example 2

Reaction was performed in the same way as in Example 1 except that 1.5 g of N,N'-ditolyl-N,N'-diphenyl-p-phenylenediamine was used in place of N,N'-dimethyl-N,N'-diphenyl-p-phenylenediamine, to afford 1.1 g of a light greyish white powder. With respect to this powder, a charge carrier mobility was determined by the TOF method in the same manner as in Example 1, which was found to be $10^{-4} \text{ cm}^2/\text{V}\cdot\text{sec}$.

Example 3

2.5 g of N-tolylidiphenyl amine was placed in a three-necked 100 ml flask which had been purged with nitrogen, then 20 ml of nitrobenzene was added and dissolved therein. Thereafter, 40 mg of p-toluenesulfonic acid and 0.6 ml of paraldehyde were added and reaction was allowed to take place at 80°C for 4 hours. The reaction solution was poured into 300 ml of ethanol and the resulting precipitate of greyish white

was filtered off, washed with ethanol and distilled water, then re-precipitated in a chloroform-ethanol system for purification, followed by drying to afford 2.6 g of a white powder. As a result of GPC determination the powder thus obtained was found to be a high polymer having an elution curve peak-top molecular weight of about 9,000 (degree of polymerization: about 31). Further, this polymer was determined for $^1\text{H-NMR}$, $^{13}\text{C-NMR}$ (Fig. 2) and IR spectra; as a result, it proved to have the following structure:

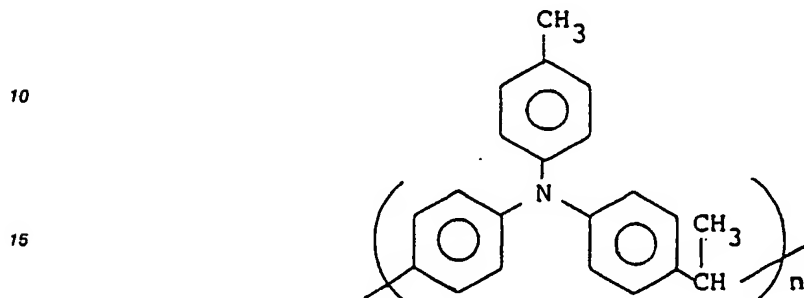

20 Also, a charge carrier mobility was determined in the same manner in Example 1; as a result, a hole mobility of $10^{-4} \text{ cm}^2/\text{V}\cdot\text{sec}$ was observed.

Example 4

25 Reaction was performed in the same way as in Example 3 except that the reaction time was changed from 4 to 8 hours, to afford 2.6 g of a white powder. As a result of GPC determination the powder thus obtained was found to have an elution curve peak-top molecular weight of about 33,000 and a polymerization degree of about 100. Further, a charge carrier mobility was determined in the same manner as in


30 Example 1, which was found to be $10^{-4} \text{ cm}^2/\text{V}\cdot\text{sec}$.
As set forth hereinabove, the photoconductor according to the present invention per se is modable and affords moldings superior in mechanical strength. Besides, it possesses a high hole carrying ability.

35 Brief Description of the Drawings

Fig. 1 is an infrared adsorption spectrum diagram of the copolymer obtained in Example 1; and
Fig. 2 is a $^{13}\text{C-NMR}$ spectrum diagram of the copolymer obtained in Example 3.

40 Claims


1. A hole transporting material is constituted by a compound represented by the following general formula (1):

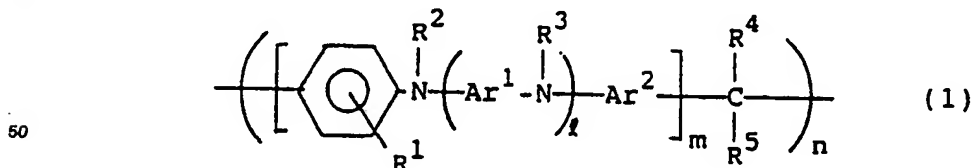


wherein R^1 , R^2 , R^3 , R^4 and R^5 , which may be the same or different, are each independently hydrogen or a hydrocarbon residue having 1 to 20 carbon atoms; Ar^1 and Ar^2 are each independently a divalent hydrocarbon residue; l is an integer of 0 or more; m is an integer of 1 or more; and n is an integer of 2 or more.

2. A hole transporting material as set forth in Claim 1, wherein R^1 , R^2 , R^3 , R^4 and R^5 are each


independently hydrogen, alkyl, aryl, aralkyl, or a derivative thereof; Ar¹ and Ar² are each independently a divalent group represented by the general formula:



(2)



(3) or

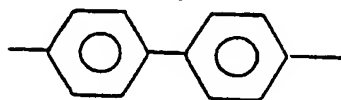

(4)


wherein R¹ is as defined above.

25 3. A hole transporting material as set forth in Claim 1 or Claim 2, wherein *l* is 1 to 5, *m* is 1 to 30, and *n* is 5 to 500.

4. A hole transporting material as set forth in Claim 1 or Claim 2, wherein *l* is 0, *m* is 1, and *n* is 30 to 1000.

5. A hole transporting material as set forth in Claim 1, which is in the form of a thin film.

30 6. A hole transporting material as set forth in Claim 1, wherein the compound represented by the general formula (1) is prepared by polycondensation of a compound represented by the following general formula (5) and a compound represented by the following general formula (6):

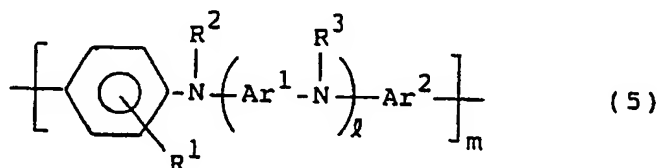


(5)

40 R^4COR^5 (6)

wherein R¹, R², R³, R⁴, R⁵, Ar¹, Ar², *l* and *m* are as defined Claim 1.

7. A photoconductor constituted by a compound represented by the following general formula (1):

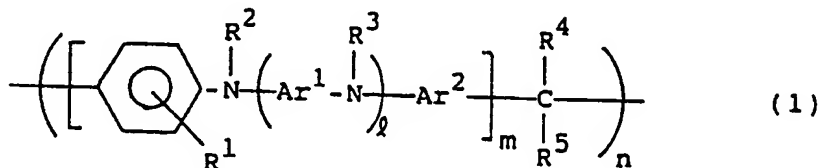


(1)


55 wherein R¹, R², R³, R⁴ and R⁵, which may be the same or different, are each independently hydrogen or a hydrocarbon residue having 1 to 20 carbon atoms; Ar¹ and Ar² are each independently a divalent aromatic hydrocarbon residue; *l* is an integer of 0 or more, *m* is an integer of 1 or more; and *n* is an integer of 2 or more.


8. A hole transporting material for an electroluminescent device, constituted by a compound repre-

5 sented by the following general formula (1):

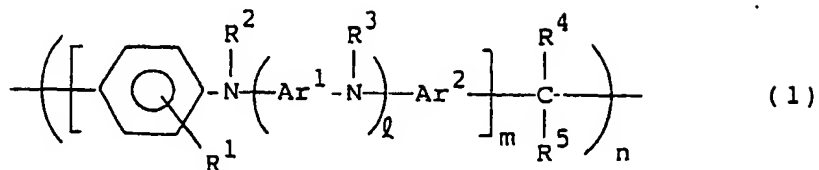

10 wherein R¹, R², R³, R⁴ and R⁵, which may be the same or different, are each independently hydrogen or a hydrocarbon residue having 1 to 20 carbon atoms; Ar¹ and Ar² are each independently a divalent aromatic hydrocarbon residue; l is an integer of 0 or more; m is an integer of 1 or more; and n is an integer of 2 or more.

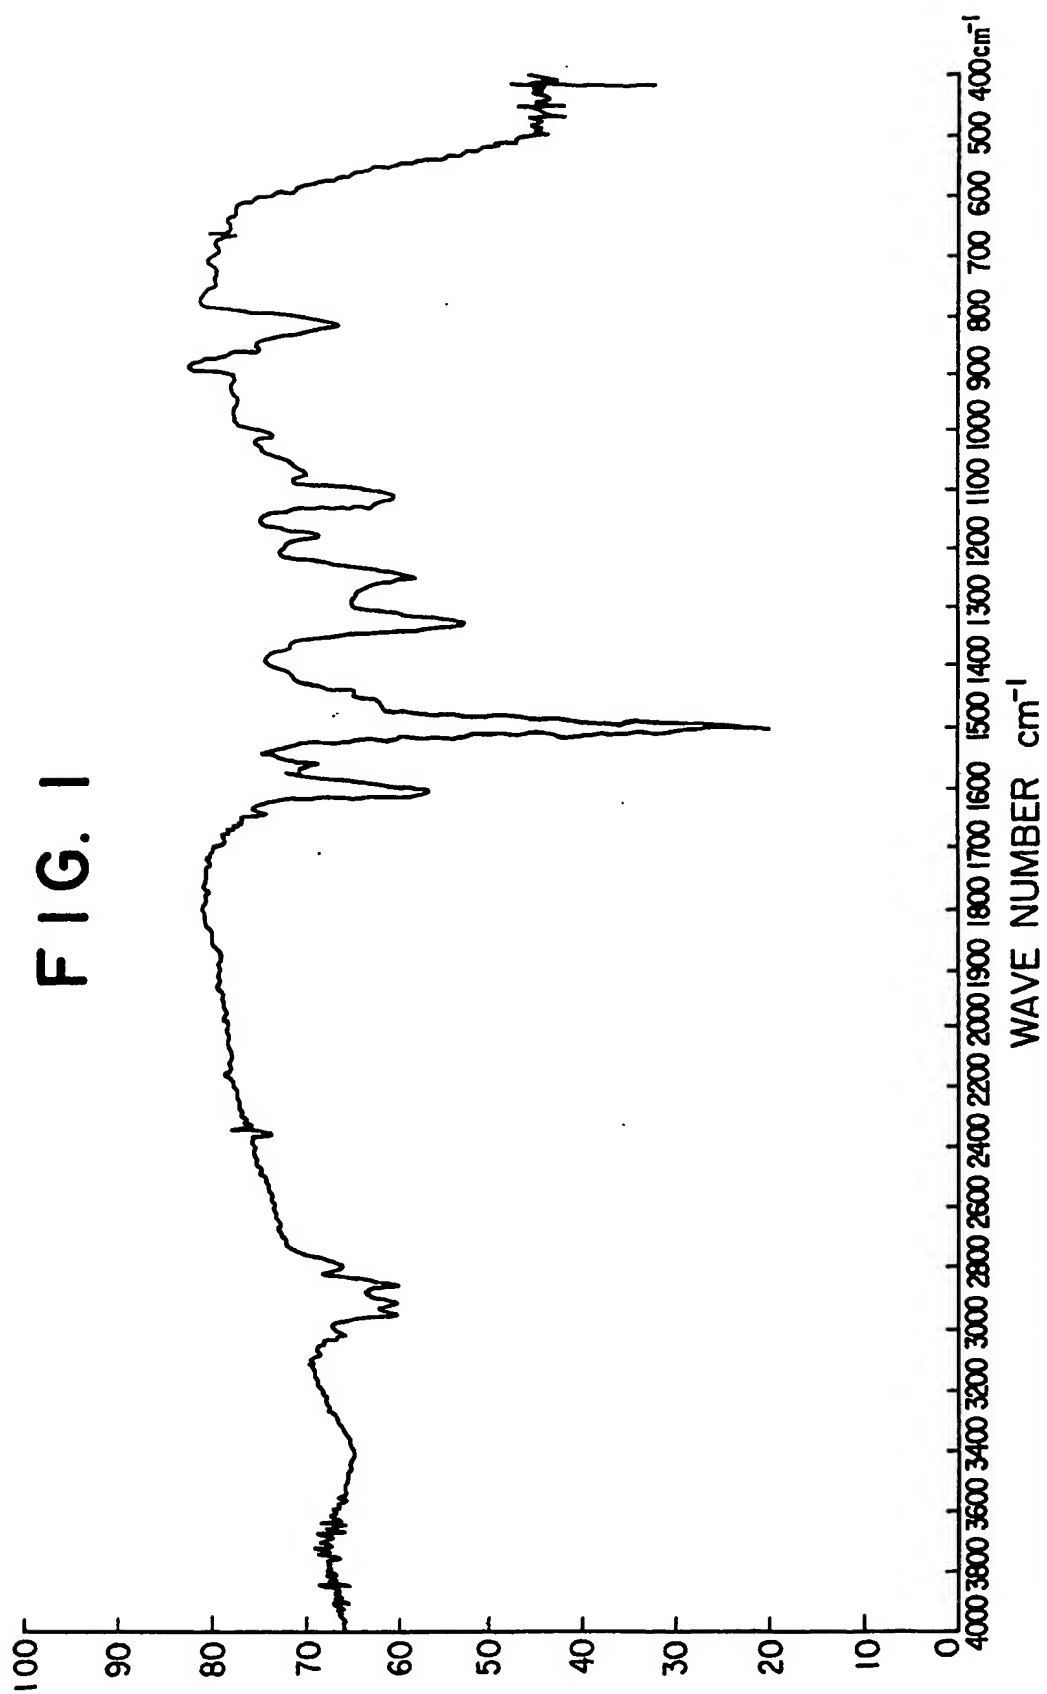

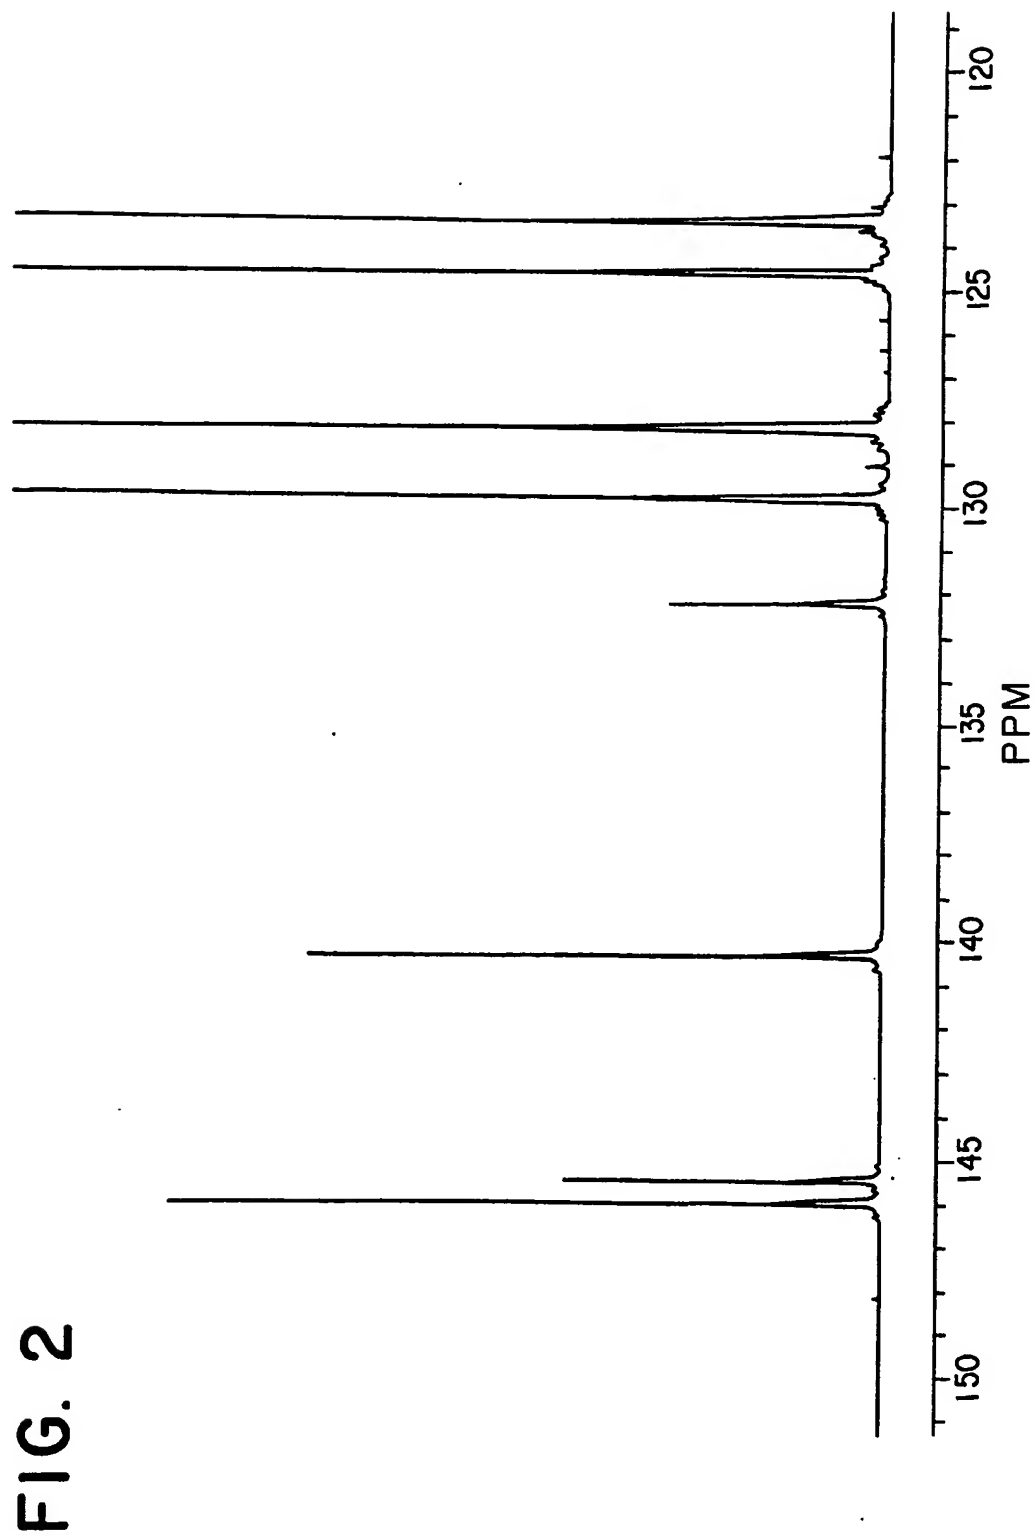

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

0 372 979
A3

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 89312802.5

(51) Int. Cl.⁵: H01B 1/12, H05B 33/26

(22) Date of filing: 08.12.89

(30) Priority: 09.12.88 JP 309940/88
31.08.89 JP 222840/89

(43) Date of publication of application:
13.06.90 Bulletin 90/24

(84) Designated Contracting States:
DE FR GB

(88) Date of deferred publication of the search report:
31.10.90 Bulletin 90/44


(71) Applicant: NIPPON OIL CO., LTD.
3-12, 1-chome, Nishi-shimbashi Minato-ku
Tokyo(JP)

(72) Inventor: Shikatani, Yutaka
2-228, Kosugi-cho Nakahara-ku
Kawasaki-shi Kanagawa-ken(JP)
Inventor: Kataoka, Naoki
17-25, Shinjonaka-machi Nakahara-ku
Kawasaki-shi Kanagawa-ken(JP)
Inventor: Kuroda, Nobuyuki
185-2, Shirohatakami-cho Kanagawa-ku
Kawasaki-shi Kanagawa-ken(JP)
Inventor: Matsuura, Kazuo
2-22-18, Higashi-Yukigaya Ota-ku
Tokyo(JP)

(74) Representative: Cropp, John Anthony David et al
MATHYS & SQUIRE 10 Fleet Street
London, EC4Y 1AY(GB)

(54) Hole transporting material.

(57) A hole transporting material is constituted by a compound represented by the following general formula (1):

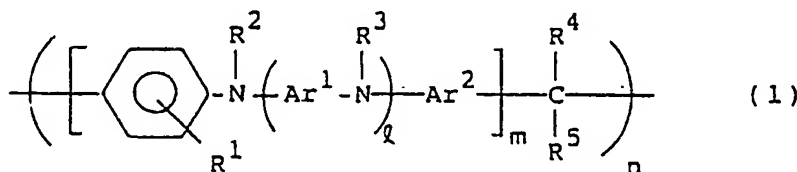

wherein R¹, R², R³, R⁴ and R⁵, which may be the same or different, are each independently hydrogen or a hydrocarbon residue having 1 to 20 carbon atoms; Ar¹ and Ar² are each independently a divalent hydrocarbon residue; l is an integer of 0 or more; m is an integer of 1 or more; and n is an integer of 2 or more.

EP 0 372 979 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 89 31 2802

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 5)
A	EP-A-0 052 961 (XEROX) * Claims 1-8 *	1	H 01 B 1/12 H 05 B 33/26
P,A	JOURNAL OF APPLIED PHYSICS, vol. 65, no. 9, 1st May 1989, pages 3610-3616, American Institute of Physics, Woodbury, NY, US; C.W. TANG et al.: "Electroluminescence of doped organic thin films" * Pages 3610-3616 *	1	H 05 B 33/14 C 08 G 73/02
			TECHNICAL FIELDS SEARCHED (Int. Cl. 5)
			H 05 B 33/00 C 08 G 73/00
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 24-08-1990	Examiner DROUOT M.C.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	